

MIKADO

Manual and Memory Lighting Control Desk 12 or 24 Channels



Main Features

- 12 faders in 2-preset mode or 24 faders in extended mode, each with flash button and LED indicator.
- 3 pages of memories with 12 submaster faders per page = 36 memories.
- A submaster can be either a memory or a chaser and up to 13 memories/chasers can run simultaneously.
- 3 preset masters – A preset, B preset and grab.
- Add/Solo button with flash level master.
- Edit and preview of stored memories with channel level indicators.
- Manual and automatic dipless crossfade.
- Speed control of chasers.
- Chaser effects including Start/Stop/Step, random, bounce, single shot, forward/reverse direction, delete/add steps.
- Audio input with bass effect for chasers and audio level adjustment.
- External line input on 1/4" mono jack for remote control of chasers.
- 1 DMX512/1990 output on XLR-5F connector.
- Internal power supply unit, input 230 V +/- 10% - 50/60 Hz.

Supplied with :

- Power supply cable with CEE 7-7 plug

Accessories

- 19" rack mount brackets **KIT/FIX/MIK/19**
A pair of metal brackets for mounting the desk into a 19" rack.
- External memory module, that plugs **MEM/EXT/MIK** into the COMMS PORT of the MIKADO, allowing recording of up to 4 show data.

Product Reference

MIKADO

Characteristics

Power Supply : 230 V +/- 10% - 50/60 Hz


Dimensions

Width x Depth x Height: 438 x 346 x 104 mm

Net weight : 5 kg

Packing

Gross weight : 7 kg

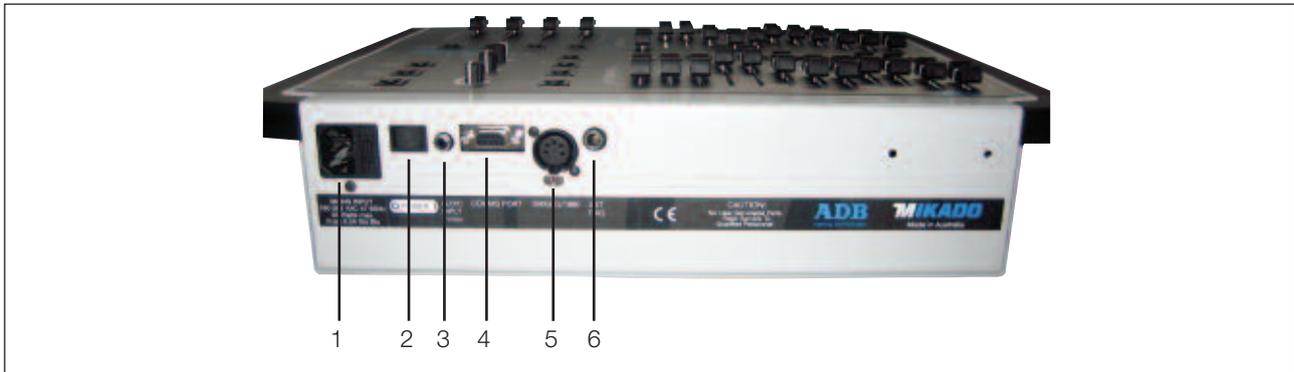

Connector Layout

1. **Mains Input**
Standard power supply connector type IEC320 - C14, with a M205/500 mA fuse.
2. **Power Switch**
3. **Audio Input**
RCA (phono) type socket to accept an audio signal. Which should have a nominal level of 1 V RMS (line level).
4. **Comms Port**
DE09-S connector to accept an optional external memory module and to upload software.
5. **DMX**
DMX512/1990 output connector (type XLR-5F)
Pin-out :
1 : GND
2 : DMX-
3 : DMX+
4 : 2th Data link -
5 : 2th Data link +
6. **Remote**
1/4" mono jack (EXT TRIG) for connecting contact closure type devices (such as a footswitch) to remotely advance the steps of a chaser.

This equipment complies with all applicable European directives and carries a CE mark.

ADB - Your Partner for Light

Belgium	N.V. ADB-TTV Technologies S.A. (Group Headquarters) Leuvensesteenweg 585, B-1930 Zaventem Tel : +32.2.709.32.11, Fax : +32.2.709.32.80, E-Mail : adb@adblighting.com
France	ADB S.A.S. Sales Office: 92, Avenue Jean Jaurès F-92120 Montrouge Tel : +33.1.41.17.48.50, Fax : +33.1.42.53.54.76, E-Mail : adb.fr@adblighting.com Factory & Group Logistics Centre: Zone industrielle Rouvroy F-02100 Saint-Quentin Tel : +33.3.23.06.35.70, Fax : +33.3.23.67.66.56, E-Mail : adb.fr@adblighting.com