

# SHURE®

LEGENDARY  
PERFORMANCE™

# SE SOUND ISOLATING™ EARPHONES

## SE115

Sound Isolating Earphones



The SE115 features 2nd Generation Single Dynamic MicroDriver to deliver warm sound quality with resonant bass.

- ▶ **Speaker** Single Dynamic MicroDriver II
- ▶ **Sensitivity** 105 dB SPL/mW
- ▶ **Impedance** 16 Ω
- ▶ **Noise Attenuation** Up to 37 dB
- ▶ **Frequency Range** 22 Hz – 17.5 kHz
- ▶ **Weight** 30 g
- ▶ **Cable for Blue / Red / Pink / Black Versions** 45 / 136 cm (modular)
- ▶ **Cable for Transparent Version** 162 cm (fixed)
- ▶ **Color** Blue / Red / Pink / Black / Transparent
- ▶ **Input Connector** 3.5 mm, gold-plated

**Includes:**

- ▲ Foam Sleeves (S, M, L)
- Soft Flex Sleeves (S, M, L)
- + Carrying Case

## SE115m/m+

Sound Isolating Headsets



SE115m/m+ Sound Isolating Headset pairs a detailed listening experience with an inline microphone and remote with volume control (m+ exclusively).

- ▶ **Speaker** Single Dynamic MicroDriver II
- ▶ **Sensitivity** 105 dB SPL/mW
- ▶ **Impedance** 16 Ω
- ▶ **Noise Attenuation** Up to 37 dB
- ▶ **Frequency Range** 22 Hz – 17.5 kHz
- ▶ **Weight** 22 g
- ▶ **Cable** 146 cm (fixed)

▶ **Color** Black

- ▶ **Input Connector** 3.5 mm, gold-plated

**Includes:**

- ▲ Foam Sleeves (S, M, L)
- Soft Flex Sleeves (S, M, L)
- + Carrying Case

## SE315

Sound Isolating Earphones



Single High-Definition MicroDriver with Tuned BassPort for full range audio and enhanced bass.

- ▶ **Speaker** Single High-Definition MicroDriver with Tuned BassPort
- ▶ **Sensitivity** 116 dB SPL/mW
- ▶ **Impedance** 27 Ω
- ▶ **Noise Attenuation** Up to 37 dB
- ▶ **Frequency Range** 22 Hz – 18.5 kHz
- ▶ **Weight** 30 g
- ▶ **Cable** 162 cm (detachable with wireform fit)

▶ **Color** Clear / Black

- ▶ **Input Connector** 3.5 mm, gold-plated

**Includes:**

- ▲ Foam Sleeves (S, M, L)
- Soft Flex Sleeves (S, M, L)
- Yellow Foam Sleeves
- ▤ Triple Flange Sleeves
- + Carrying Case

## SE425

Sound Isolating Earphones



Dual High-Definition MicroDrivers with dedicated single woofer and tweeter in each earpiece for accurate and balanced sound.

- ▶ **Speaker** Dual High-Definition MicroDrivers
- ▶ **Sensitivity** 109 dB SPL/mW
- ▶ **Impedance** 22 Ω
- ▶ **Noise Attenuation** Up to 37 dB
- ▶ **Frequency Range** 20 Hz – 19 kHz
- ▶ **Weight** 30 g
- ▶ **Cable** 162 cm (detachable with wireform fit)

▶ **Color** Clear / Metallic Silver

- ▶ **Input Connector** 3.5 mm, gold-plated

**Includes:**

- ▲ Foam Sleeves (S, M, L)
- Soft Flex Sleeves (S, M, L)
- Yellow Foam Sleeves
- ▤ Triple Flange Sleeves
- + Premium Carrying Case
- + 6.3 mm-Adapter

## SE535

Sound Isolating Earphones



Triple High-Definition MicroDrivers with dual woofers and single tweeter in each earpiece for spacious sound with rich bass.


- ▶ **Speaker** Triple High-Definition MicroDrivers
- ▶ **Sensitivity** 119 dB SPL/mW
- ▶ **Impedance** 36 Ω
- ▶ **Noise Attenuation** Up to 37 dB
- ▶ **Frequency Range** 18 Hz – 19 kHz
- ▶ **Weight** 30 g
- ▶ **Cable** 162 cm (detachable with wireform fit)

▶ **Color** Clear / Metallic Bronze

- ▶ **Input Connector** 3.5 mm, gold-plated

**Includes:**

- ▲ Foam Sleeves (S, M, L)
- Soft Flex Sleeves (S, M, L)
- Yellow Foam Sleeves
- ▤ Triple Flange Sleeves
- + Premium Carrying Case
- + 6.3 mm-Adapter
- + Airline-Adapter
- + Volume Control

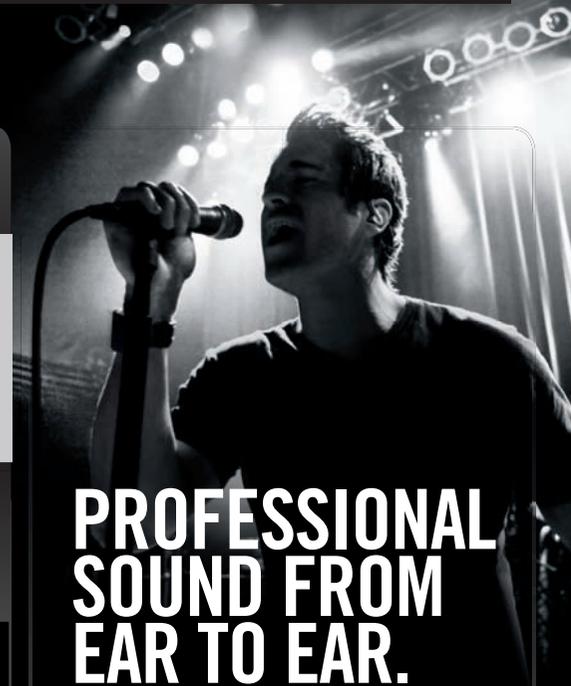

# PROFESSIONAL SOUND FROM EAR TO EAR.

The SE Sound Isolating™ Earphones from Shure provide a wide variety of different sound signatures: The Single Dynamic MicroDriver II of the SE115 delivers a resonant bass, the SE315 uses a Single High-Definition MicroDriver with Tuned BassPort for full range audio, the SE425 with Dual High-Definition MicroDrivers provides an accurate, balanced sound, and the SE535 offers a spacious sound with rich bass thanks to the Triple High-Definition MicroDrivers with dual woofers and single tweeter.

Ideal for professional monitoring and personal listening.

Europe, Middle East, Africa: Shure Europe GmbH | Wannenäckerstr. 28 | 74078 Heilbronn | Germany | www.shure.eu  
UK, Ireland: Shure Distribution UK | Unit 2 The I O Centre | Lea Road | Waltham Abbey EN9 1AS | UK | www.shure.co.uk

© 2010 Shure Incorporated

07/2010

Whilst every effort has been made to ensure that the information in this document is correct, we accept no liability in respect of errors or omissions. All specifications within this document are subject to change without notice. Usage rights of the photography in this document expire in March 2012.

